


POWERPLUS[®]

HIGH QUALITY TOOLS

POWLI241

LED FLOODLIGHT
WITH SENSOR

LED SCHIJNWERPER MET SENSOR
PROJECTEUR À DEL AVEC DÉTECTEUR
LED STRAHLER MIT SENSOR
FOCO LED CON SENSOR

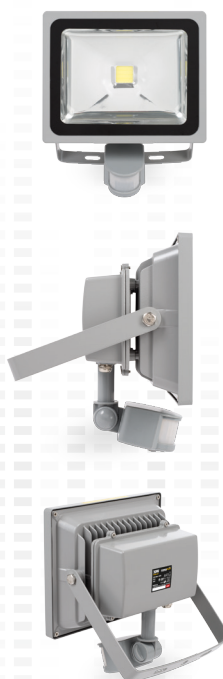

This LED floodlight is equipped with a passive infrared sensor that can detect the heat radiation and motion of people, animals or cars within a range of 10 meters. The time delay setting allows you to adjust the light duration from 5 seconds to 12 minutes. To save energy and prolong the life of the lamp, the POWLI241 will only operate and detect motion when it's dark. It will provide the necessary security illumination and drastically increase your personal comfort.

The POWLI241 is water-resistant, dustproof and has an impact-resistant housing as the body is built from aluminium. It emits 2160 lumen with 30W of electricity which makes it a great energy saving floodlight. The floodlight has a high-quality surface mounted LED light that produces a natural daylight colour temperature of 6500K. On top of that, the floodlight has a service life of over 50.000 operating hours. The floodlight is easy to install and can be pointed at different angles thanks to its adjustable bracket.

HIGH POWER LED

WITH SENSOR

SURFACE MOUNTED LED

30W

50.000h
NOMINAL LIFETIME

2160 LUMEN

6500 KELVIN

220-240V~ 50Hz

ALU HOUSING

IP44

IN & OUT DOOR



TECHNICAL SPECIFICATIONS POWLI241		Features	Box content	Symbols
Power	220-240V~ 50Hz	<ul style="list-style-type: none"> • Epistar surface mounted LED • Adjustable bracket • Sensor 	1x LED floodlight with sensor	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">CHEMICAL SAFETY</div> <div style="font-size: 2em;">✓</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">Intertek</div> <div style="font-size: 1.5em;">GS</div> </div> <div style="font-size: 3em; margin-top: 10px;">CE</div>
Lumen	2160Lm		1x manual	
Nominal lifetime	50.000h			
Colour temperature	6500K			
Material	Aluminium housing			
Protection degree	IP44			

VARO VARO - VIC.VAN ROMPUY nv - DIY & GARDEN TOOLS
 JOSEPH VAN INSTRAAAT 9 - 2500 LIER - BELGIUM
 TEL +32 (0)3 292.92.92 | FAX +32 (0)3 292.92.72
INFO@VARO.COM | WWW.VARO.COM

Box (piece)
POWLI241



Our +50 years of experience guarantee a professional and high quality service.